


Features

- Deally Suited for Automatic Assembly
- Low Power Loss,High Efficiency
- For Use in Low Voltage Application
- Plastic Case Material has UL Flammability Classification Rating 94V-0

Mechanical Data

- Case: Molded plastic SMAF
- Terminals: Plated leads solderable per MIL-STD-750,Method 2026 guaranteed
- Polarity:Cathode Band or Cathode Notch
- Mounting Position: Any
- Making: Type Number

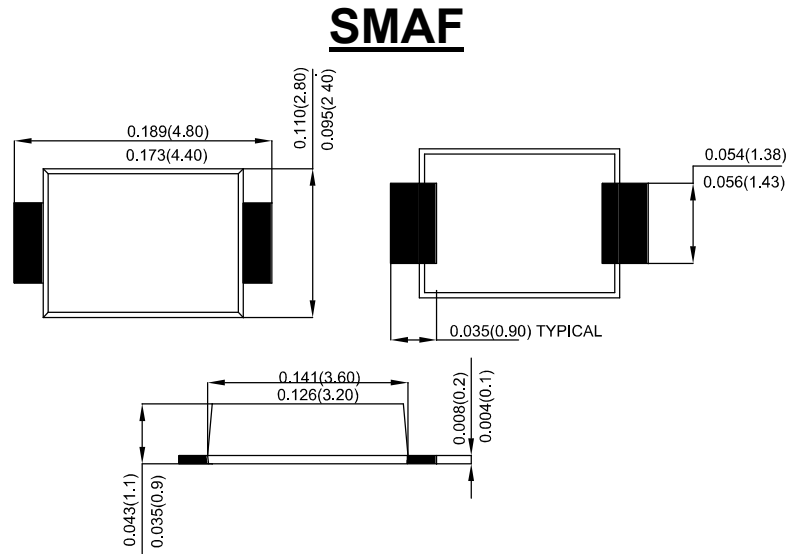

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	R3M	Unit
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	1000	V
Maximum RMS Voltage	V_{RMS}	700	V
Maximum DC Blocking Voltage	V_{DC}	1000	V
Average Rectified Output Current @ $T_L = 85^\circ C$	I_o	3.0	A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	80	A
Forward Voltage @ $I_F = 3.0A$	V_{FM}	1.3	V
Peak Reverse Current @ $T_A = 25^\circ C$	I_R	5.0	uA
At Rated DC Blocking Voltage @ $T_A = 125^\circ C$		250	
Maximum Reverse Recovery Time(Note 1)	T_{rr}	200	ns
Typical Junction Capacitance (Note 2)	C_J	30	pF
Typical Thermal Resistance Junction to Ambient(Note 3)	$R_{\theta JA}$	60	$^\circ C/W$
Operating Temperature Range	T_J	-55 to +150	$^\circ C$
Storage Temperature Range	T_{STG}	-55 to +150	$^\circ C$

Note: 1.Reverse Recovery Test Conditions: $I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A$.

2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

3. 8.0MM² (.013mm Thick) Land Areas.

FIG.1 MAXIMUM AVERAGE FORWARD CURRENT DERATING

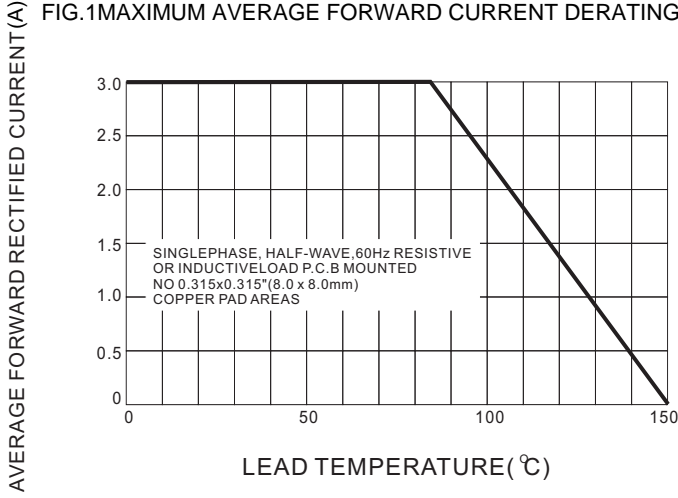


FIG.2 TYPICAL FORWARD CHARACTERISTICS

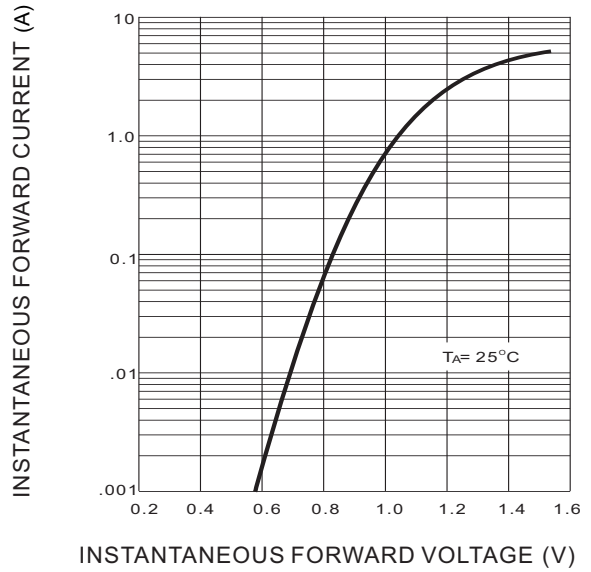


FIG.3 MAXIMUM NON-REPEITIVE SURGE CURRENT

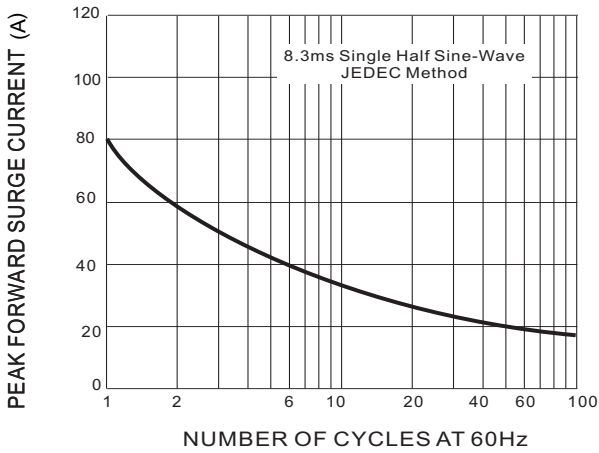


FIG.4 TYPICAL JUNCTION CAPACITANCE

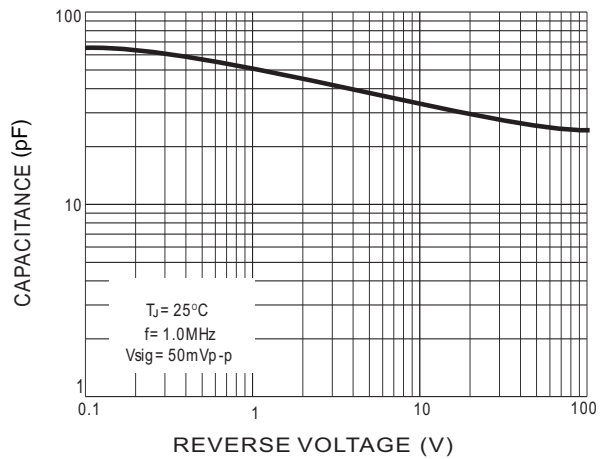


FIG.5 TYPICAL REVERSE CHARACTERISTICS

